





GAS

II2G Ex d IIB

Zone 1 - Zone 2


❄ -20°C ÷ ☀ +40°C

Materiale : Lega leggera
Viti : Acciaio zincato
Viti a richiesta : Acciaio inox

Material : Light alloy
Screws : Galvanized steel
Screws on request : Stainless steel



Codice Code (Gk)	Codice Code (NPT)	Ø	A	C	E	H	R	Peso Weight [kg]
LBH 1	LBH 1N	½	70	132	95	165	21	0,434
LBH 2	LBH 2N	¾	70	132	95	165	21	0,404
LBH 3	LBH 3N	1	70	132	112	168	30	0,455
LBH 4	LBH 4N	1¼	100	175	155	230	50	1,277
LBH 5	LBH 5N	1½	110	220	132	265	70	1,142
LBH 6	LBH 6N	2	110	220	132	265	70	1,024
LBH 7	LBH 7N	2½	136	267	250	363	96	3,569
LBH 8	LBH 8N	3	136	267	250	363	96	3,171
LBH 9	LBH 9N	4	181	605	305	720	125	10,850

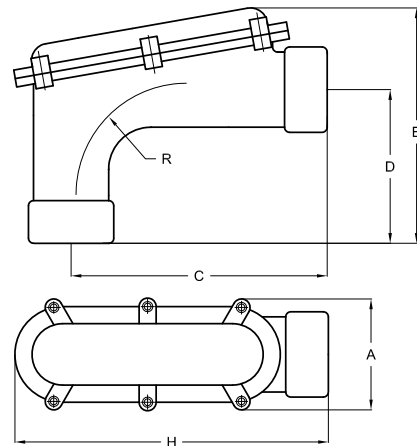

GAS

II2G Ex d IIC /Ex e II

IP66

Zone 1 - Zone 21 - Zone 2 - Zone 22

DUST

II2D Ex tD A21

IP66


❄ -20°C ÷ ☀ +40°C

❄ -50°C ÷ ☀ +80°C

Materiale : Lega leggera

Material : Light alloy

Codice Code (Gk)	Codice Code (NPT)	Ø	A	H	R	Peso Weight [kg]
ELF 1L	ELF 1LN	½	41	55	20	0,055
ELF 2L	ELF 2LN	¾	50	66	30	0,100
ELF 3L	ELF 3LN	1	66	88	35	0,200
ELF 4L	ELF 4LN	1¼	81	111	50	0,395
ELF 5L	ELF 5LN	1½	81	111	50	0,370
ELF 6L	ELF 6LN	2	94	131	60	0,625
ELF 7L	ELF 7LN	2½	110	155	65	0,880
ELF 8L	ELF 8LN	3	154	205	85	1,480
ELF 9L	ELF 9LN	4	163	220	100	2,345



Filettatura conica : protezione IP 66
utilizzare sigillante Loctite 577
Taper thread : protection IP 66
use compound Loctite 577